


TECHNICAL INFORMATION | TRACK-MOUNTED JAW CRUSHERS

# MOBICAT MC 140 Z



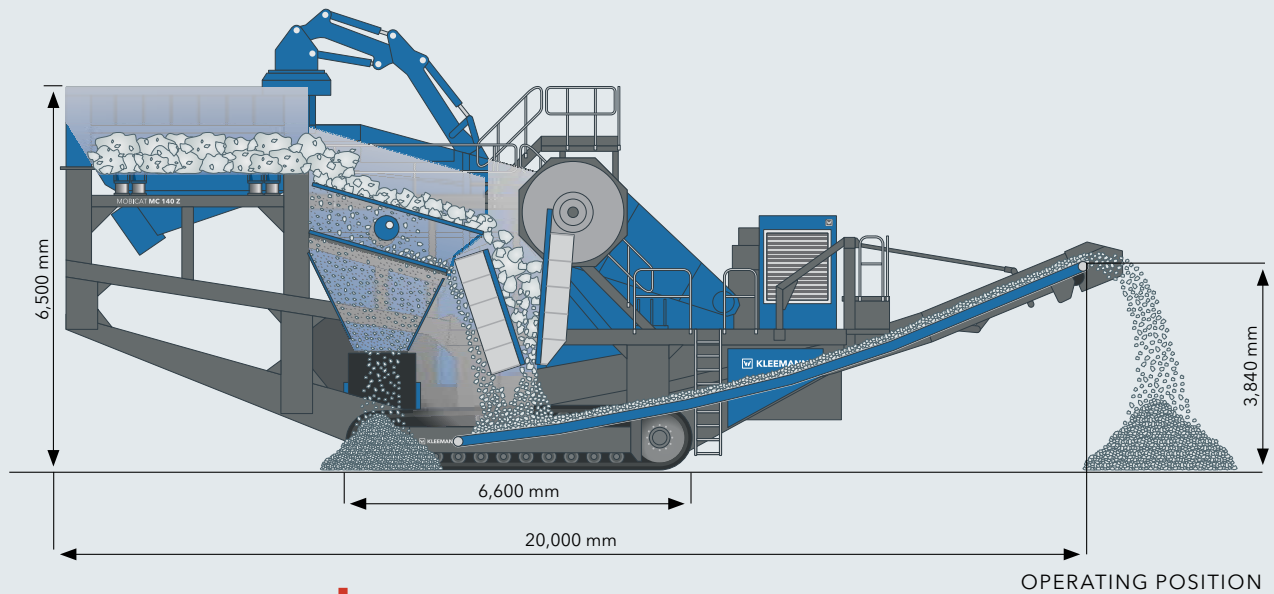

## TECHNICAL HIGHLIGHTS

- ▣ Frequency-controlled vibrating feeder
- ▣ Independent vibrating double-deck prescreen
- ▣ Option for external power supply (optional)
- ▣ Diesel-electric drive concept

## TECHNICAL INFORMATION MC 140 Z

### Feeding unit

Feed capacity up to approx. (t/h) <sup>1)</sup>	750
Feed size max. (mm)	1,260 x 790
Feed height (mm)	6,500
Hopper volume (m <sup>3</sup> )	10
Width x Length (mm)	3,700 x 4,600

### Vibrating feeder

Width x Length (mm)	1,350 x 4,100
---------------------	---------------

### Prescreening

Type	double-deck heavy-piece screen
Width x Length (mm)	1,400 x 3,000

### Side discharge conveyor (optional)

Width x Length (mm)	1,000 x 8,000
Discharge height approx. (mm)	4,000

### Crusher

Single toggle jaw crusher type	STR 1,400 x 1,130
Crusher inlet width x depth (mm)	1,400 x 1,130
Crusher weight approx. (kg)	54,000
Crusher drive type approx. (kW)	electric, 200
Adjustment range of gap width (mm) <sup>2)</sup>	110 - 260
Crusher gap adjustment	hydraulically supported

### Crushing capacity <sup>3)</sup>

with CSS 130 mm: approx. from - to (t/h)	270 - 340
with CSS 160 mm: approx. from - to (t/h)	340 - 420
with CSS 200 mm: approx. from - to (t/h)	430 - 520
with CSS 250 mm: approx. from - to (t/h)	550 - 650

### Vibrating feeder (optional)

Width x Length (mm)	1,400 x 2,600
---------------------	---------------

### Crusher discharge conveyor

Width x Length (mm)	1,400 x 12,000
Width x Length with vibrating extractor (option) (mm)	1,500 x 10,400
Discharge height approx. (mm)	3,840
Discharge height with vibrating extractor (option) (mm)	4,300

### Power supply unit

Drive concept	diesel-electric drive
Scania (3a) (kW)	438 (1,500 rpm)
Scania (LRC) (kW)	438 (1,500 rpm)
Generator (kVA)	600

### Weight

Total weight without options approx. (kg)	160,000
---	---------

<sup>1)</sup> dependent on the type and composition of the feed material, the feed size, the prescreening, as well as the desired final grain size

<sup>2)</sup> gap width range can be changed by using special crusher jaws and/or pressure plates

<sup>3)</sup> for hard stone, CSS = Close Side Setting

**Standard features:** Feed hopper / Frequency-controlled vibrating feeder / fill level monitor at crusher inlet / Radio remote control / PLC control with LCD display / Control cabinet, with double dust encapsulation, lockable, suspended and with over pressure system / Lighting

**Options:** Side discharge conveyor / Electromagnetic separator, permanent magnet, magnet preparation / External power supply / Long crusher discharge conveyor / Rock chisel / Hydraulic folding device for crusher discharge conveyor / Preparation for installation of belt scale / Belt covers (aluminium, tarpaulin) / Remote maintenance using GSM modem / Socket 110 V / Spray system for dust reduction