




TECHNICAL SPECIFICATIONS | TRACK-MOUNTED SCREENING PLANT

MOBISCREEN MS 15 Z



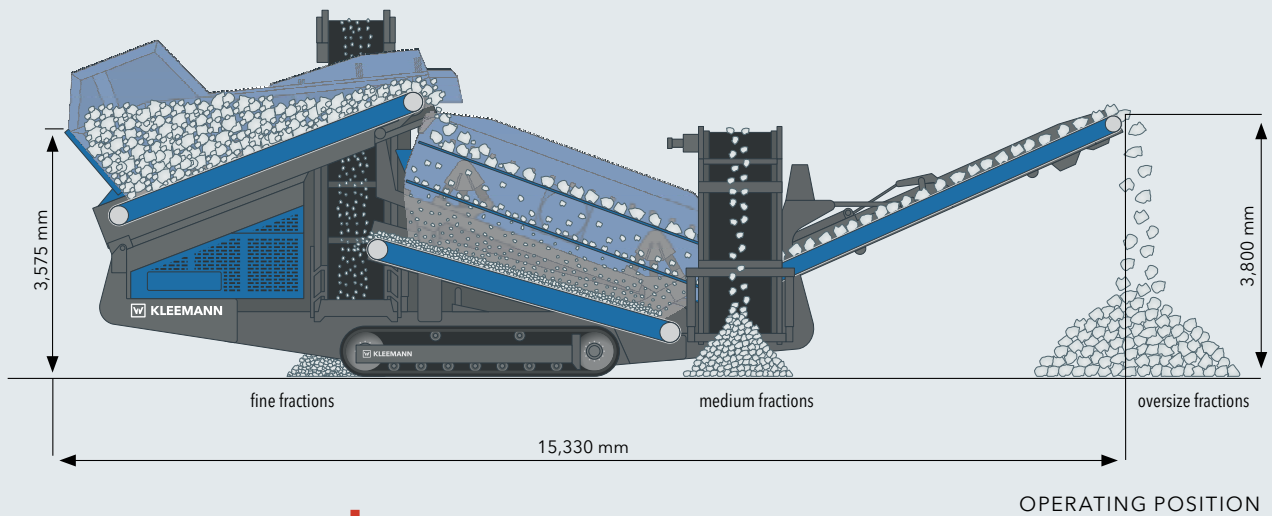

TECHNICAL HIGHLIGHTS

- ▣ Double-deck screening unit
- ▣ Diesel-hydraulic drive
- ▣ Scalping screen
- ▣ Max. feed size: 400 mm

TECHNICAL SPECIFICATIONS MS 15 Z

Feeding unit

Feed capacity up to approx. (t/h)	400
Feed size max. (mm)	400
Feed height (mm)	3,575 (3,035)
Hopper capacity (m ³)	8

Belt conveyor feeder

Width x length (mm)	1,400 x 4,500
Type (optional)	variable speed

Screening unit

Type	double-deck vibration screen
Top deck width x length (mm)	1,520 x 4,880
Bottom deck width x length (mm)	1,520 x 4,575

Belt conveyor underflow material

Width x length (mm)	1,200 x 4,500
---------------------	---------------

Bottom deck underflow discharge conveyor (fine fractions)

Width x length (mm)	900 x 7,600
Discharge height approx. (mm)	3,500 - 4,000

Bottom deck overflow discharge conveyor (medium fractions)

Width x length (mm)	900 x 7,600
Discharge height approx. (mm)	2,500 - 3,600

Top deck overflow discharge conveyor (oversize fractions)

Width x length (mm)	1,400 x 5,500
Discharge height approx. (mm)	2,800 - 3,800

Drive

Drive concept	Diesel-hydraulic drive
Powerpack CAT (Tier 3, 4i,4f) (kW)	95

Transport

Transport height approx. (mm)	3,400
Transport length approx. (mm)	15,330
Transport width approx. (mm)	2,900
Transport weight approx. (kg)	34,000