

Technical specification

Binding agent spreader SW 3 FC




Technical specification

02
03

Binding agent spreader SW 3 FC	
Container	
Container capacity	3 m ³
Size of filling connector/filling hose	3"/3"
Spreading unit (metering feeders)	
Working width/partial widths	2,460 mm / 3 x 820 mm
Spreading quantity at 1 km/h* ¹	1-50 l/m ²
Weights	
Own weight* ²	1,140 kg
Dimensions (L x W x H)	1,600 x 2,550 x 1,990 mm
Tractor requirements	
Power lift	three-point category 2 DIN/ISO 730-1
Required hydraulic output	50 l/min at 180 bar
Max. permissible hydraulic volumetric flow rate	75 l/min
Electrical system	12 V

*¹ = quantity applied depends on various parameters (e.g. binder, feeding unit and job-site conditions)

*² = basic machine without any additional equipment

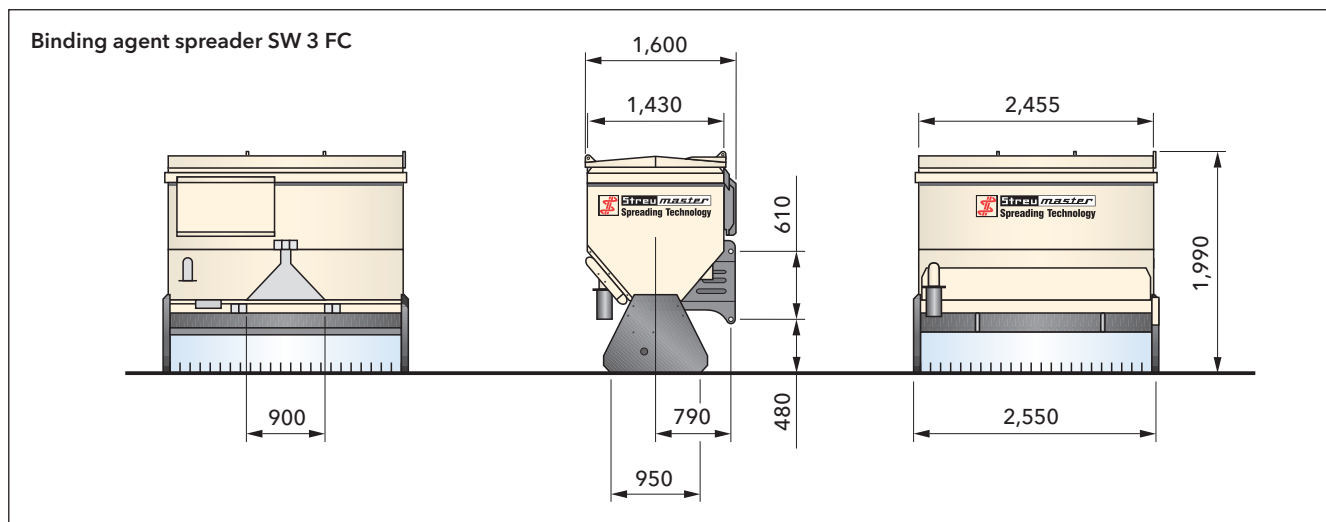

Dimensions in mm

Equipment features

	SW 3 FC
Container / chassis	
Loading and lashing lugs	■
Hydraulic fold-down container cover	■
Relief cover	■
Vent pipe and pressure relief flap integrated into the container	■
Vent pipe and pressure relief flap integrated into the container	■
Drive / control system / on-board computer	
Hydraulic and electrical systems centrally located with protective cover	■
Electronic weighing device	□
Radar unit for speed sensing	□
Control unit	■
Operator terminal for automatic adjustment of the quantity to be spread	□
Infinite adjustment of the quantity to be spread	■
Level indicator "Container full"	■
Spreading unit	
Size DN 230-10 rotary feeding unit	■
Size DN 230-20 rotary feeding unit for small quantities	□
Self-cleaning rotary feeders	■
Three separately controlled part-widths	■
All-automatic dosing, regardless of the travel speed	□
Miscellaneous	
Dust protection	■
Bag filter package	□

■ = standard equipment
 □ = optional equipment



WIRTGEN GmbH

Reinhard-Wirtgen-Str. 2 · 53578 Windhagen · Germany
Phone: +49 (0)26 45/131-0 · Fax: +49 (0)26 45/131-392
Internet: www.wirtgen.com · E-mail: info@wirtgen.com

Made by STREUMASTER Maschinenbau GmbH