

H 12i

Compactor with smooth drum


Compactors Series H / Series H235









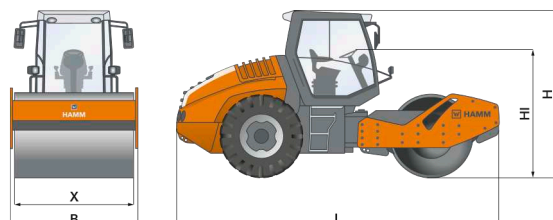


HIGHLIGHTS H

- > 3-point swivel joint for optimum driving comfort
- > Optimum ease of maintenance, long service intervals
- > Ergonomic driver seat for perfect all-round visibility
- > Excellent hill climbing ability via self-locking differential
- > Hydrostatic steering
- > Clear information display

Machine dimensions		
Total length (L)	mm	5850
Width (B)	mm	2284
Total height (H)	mm	2960
Drum width (X)	mm	2140
Height loading, min. (Hl)	mm	2308



TIER 4
EU Stage IV
/ EPA Tier 4

TECHNICAL DATA		Unit	H 12i
	Weights		
	Operating weight with cab	kg	11715
	Operating weight with ROPS	kg	11465
	Operating weight, max.	kg	14120
	Axle load, front/rear	kg	6325/5390
	Static linear load, front	kg/cm	29,6
	Machine dimensions		
	Total length	mm	5850
	Total height with cab	mm	2960
	Height loading, min.	mm	2308
	Wheel base	mm	3150
	Ground clearance, centre	mm	390
	Total width with cab	mm	2284
	Turning radius, inside	mm	3870
	Angle of driving slope, front/rear	°	53/32
	Drum dimensions		
	Drum width, front	mm	2140
	Drum diameter, front	mm	1504
	Drum type, front		smooth
	Drum thickness, front	mm	25
	Wheel dimensions		
	Size of tyres, rear		AW 23.1-26 12 PR
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 3.6 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		85,0/115,6/2300
	Power rating SAE J1349, kW/HP/rpm		85,0/113,9/2300
	Emissions standard EU/USA		EU Stage IV / EPA Tier 4
	Exhaust gas after-treatment		DOC-SCR
	Drive		
	Speed, infinitely variable	km/h	0-12,0
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	54/59
	Vibration		
	Vibration frequency, front, I/II	Hz	30/36
	Amplitude, front, I/II	mm	2,04/0,84
	Centrifugal force, front, I/II	kN	246/136
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	280
	AdBlue/DEF tank, content	L	32
	Sound level		
	Acoustic power LW(A), sticker		107
	Acoustic power LW(A), measured		106

EQUIPMENT

2 large working and rear view mirrors, 2 multiply-adjustable armrests, 3-point articulation, Storage bin, lockable, Dashboard with displays, indicator lights and function key, Automatic traction control and anti-slip control, Operating concept Easy Drive, ECO mode, Spring-mounted, rotatable and horizontally adjustable driver's seat with armrest, Speed preselect, Cup holder, Hammtronic - electronic machine management, Hose protection on front vehicle, Vibration-isolated operator's platform, Space for cold box, Stepless hydrostatic all-wheel drive, Automatic vibration system, ROPS, rigid

OPTIONAL EQUIPMENT

Working lights, Back-up alarm (reversing), Frequency control, HCQ-GPS compaction documentation, preparation, HAMM Compaction Meter, Radio, Rotating beacon, Dozer blade, Protective roof, Padfoot shells, Auxiliary heater, Rear area camera, Telematics interface, Bonnet with electrical easy access engine cover release, ROPS cabin with heating, FOPS-approved (level I), ROPS cabin with heating and air conditioning, FOPS-approved (level I), Safety belt monitoring device, Automatic engine-off function, WIFMS fleet management interface, Combination scraper for smooth drum and padfoot shells, Steering column with comfort exit and tiltable dashboard, Rotating seat adapter

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

